

About us

ceramic is a great evolution in ceramic floorings that evoke wood, fusing warmth and naturalness. In this catalogue you will find a wide variety of woods, shades and finishes, The investment in R&D allows us to be the latest not only in the production process, we also have the technology to decorate our pieces providing them with a better finish and a more realistic effect. A careful selection of the most characteristic woods and of greater aesthetic value make our product more differentiating.

we promote our ecological character by obtaining certificates that guarantee our effort. The objective is to preserve the present and the future. Efficient energy management, rational use of water and the minimization of emissions are some of our objectives. For this reason we have recently been granted to our product


INSPIRE BY WOOD

The Vision of us

we excellence is not a onetime effort, it's a custom to be followed on regular basis, and so we abide by all the necessary norms and deliver supreme quality resources. We will to continue doing so and attain success by being a market leader Apart from that, we also desire to be recognized as one of the most fruitful employers for our team, along with being a productive patron for our associates.





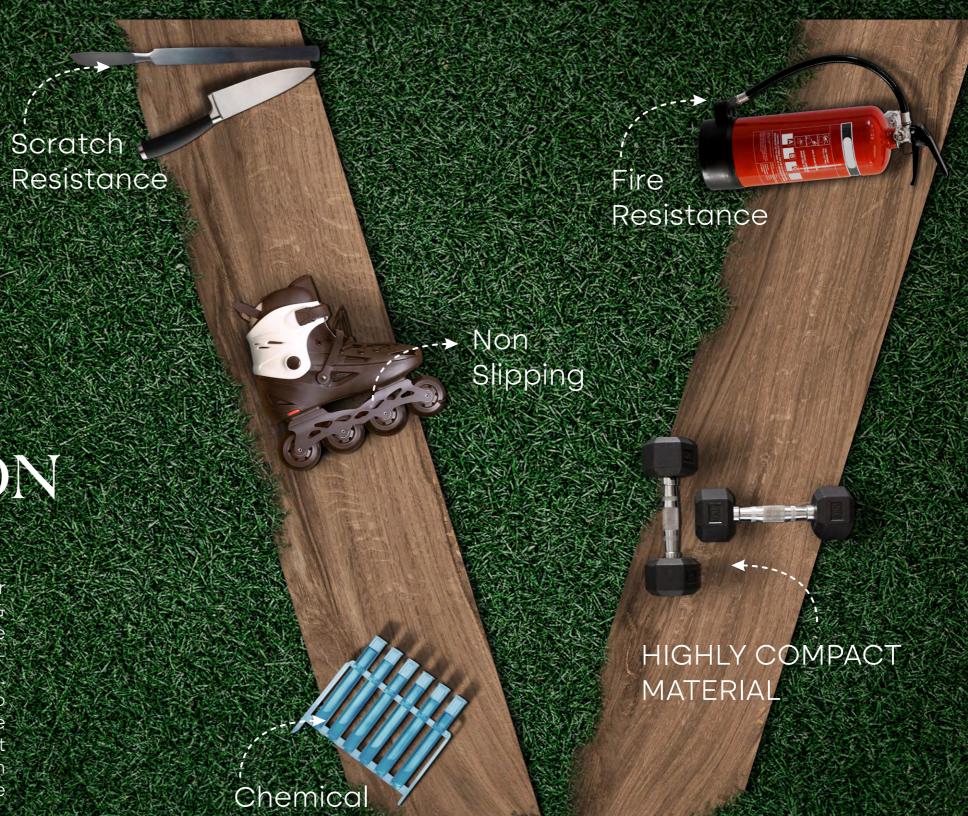


Resistance

TECHNICAL SPECIFICATION

Our elite size 200x1200mm, is carved to adore your spaces by endless possibilities of endurance & eternity. Our Majestic creation is crafted to last the generation with its anti-scratch, fire-resistant, frost-resistant, chemical-resistant, it has low absorption. Shades of aplomb lie within our plank surfaces to reflect the indeed ceramic art. It exemplifies the robustness & vigor of extravaganza. Surfaces that awestruck the exceptional feel when touched with hands or eye sights. Finishes that make a bold move while leaving you speechless.



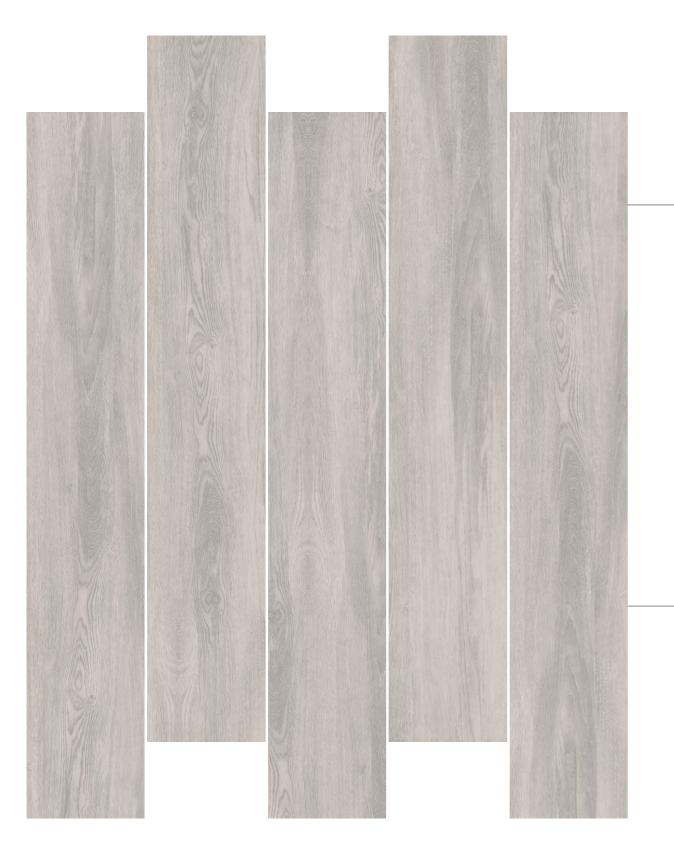

ARACIA


GREY

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM **7**

LAYING PATTERN






















BARBERRY

BEIGE


FINISH **MATT**

GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 6

LAYING PATTERN









Resistant
















CORNEL CEDAR

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 6

LAYING PATTERN









Resistant







al Environmen nt Friendly








HAZEL CEDAR

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 3

LAYING PATTERN















y To Heat an Resistant

Chemical Resistant

Stain Resistant








JATOBA BROWN

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOⅢ **11**

LAYING PATTERN









Resistant














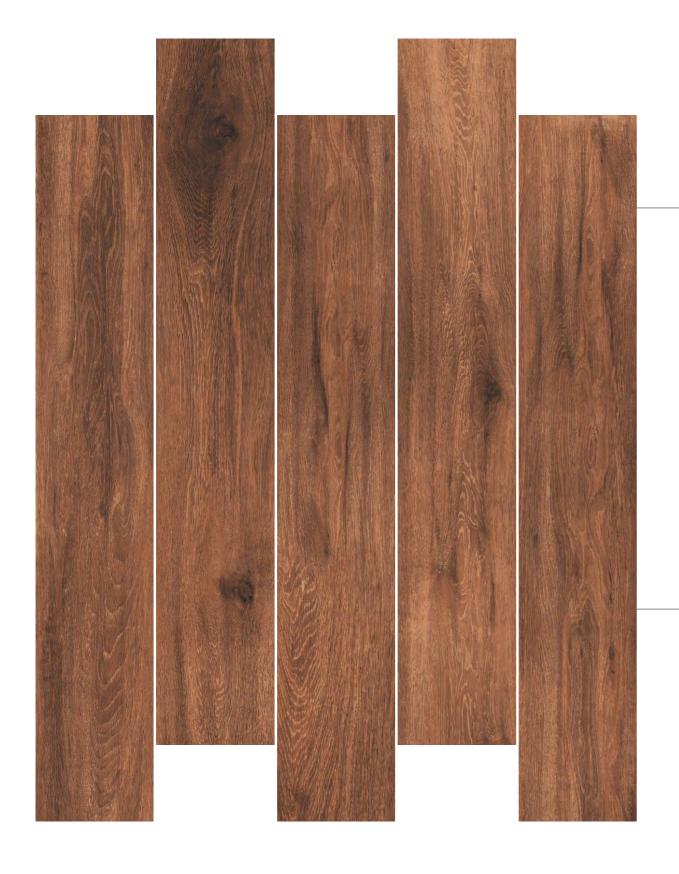


KASHMIR WOODCOLOR BROWN

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOⅢ **11**

LAYING PATTERN















t Stain Resista








LOMBARDY BEIGE

FINISH ПАТТ **GLAZED VITRIFIED TILES**

SIZE 200X1200MM

RANDOM

LAYING PATTERN













Easy To Clean

Friendly








MAPLECOLOR BEIGE

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN















Environment Friendly

Easy To Heat Clean Resistant








MAPLECOLOR BROWN

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN









Resistant














MAPLECOLOR COFFEE

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN















Heat Chemical Environm Resistant Resistant Friendly








MAPLECOLOR GREY

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN









Resistant







ent Stain Resist







MAPLECOLOR OLIVE

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN















Environment Stai Friendly Res








MORENA BEIGE

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN









Resistant







Stain Resistant








MORENAGREY

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN









Resistant
















MORENA SANDAL

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOM 8

LAYING PATTERN









Resistant
















RUBASA COPPER

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOⅢ **14**

LAYING PATTERN









Resistant







ent Stain Resistant








RUBASA Honey

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOⅢ **14**

LAYING PATTERN









Resistant







Stain Resistant








RUBASA Natural

FINISH **MATT**GLAZED VITRIFIED TILES

SIZE **200X1200MM**

RANDOⅢ **14**

LAYING PATTERN









Resistant
















RUBASA WOOD

FINISH ПАТТ **GLAZED VITRIFIED TILES**

SIZE 200X1200MM

RANDOM 14

LAYING PATTERN














Friendly







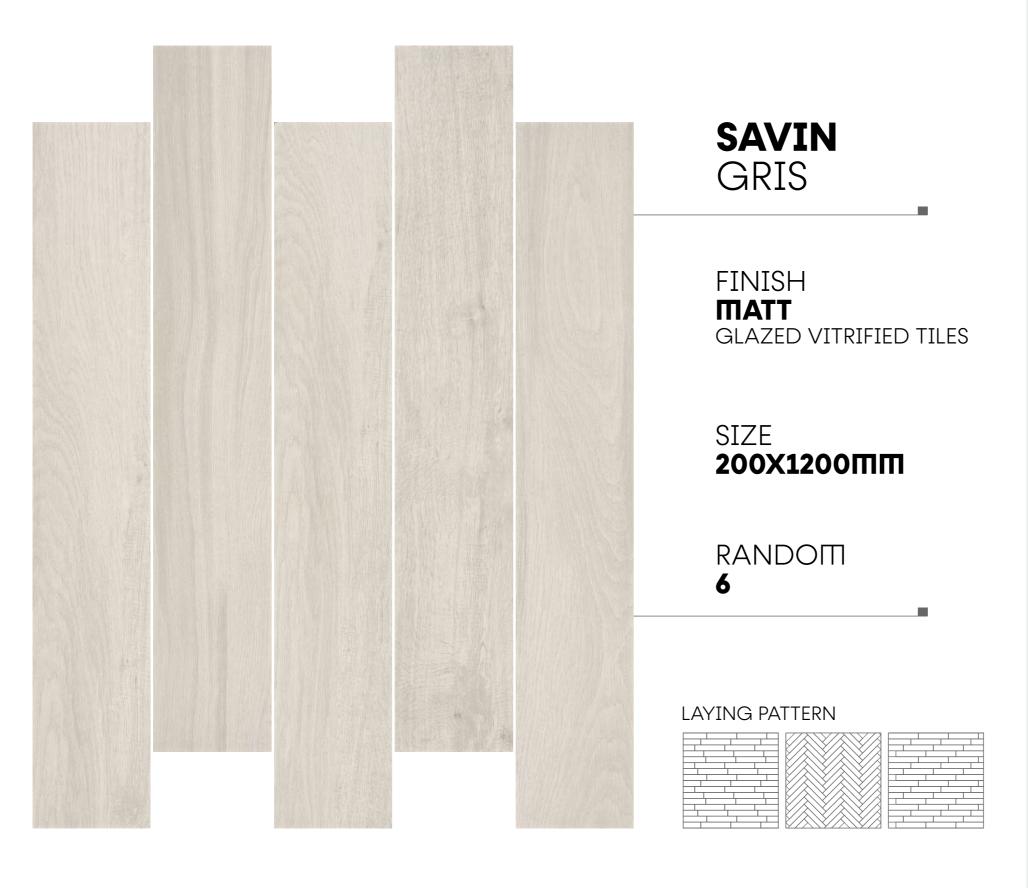







Resistant









t Stain Resistant



WOOD PLANKLAYING PATTERNS




Brick Pattern




Basketwoove Pattern




Single Herringbone Pattern



Haddon Hall Pattern




Standard Block Pattern




Diagonal Basket Pattern




Double Herringbone Pattern




Chevron Pattern




Diagonal Block Pattern



Square Basket Pattern



Diagonal Herringbone Pattern



Monticello Pattern

TECHNICAL SPECIFICATIONS

Standards according to ISO 13006 / EN 14411 / IS 15622-2017 (Group B1a): Dry - Pressed Ceramic Tiles (Glazed Vitrified Tiles)

CHARACTERISTIC	TEST METHOD	REQUIREMENTS	OUR STANDARD
D	IMENSIONS & SURFA	ACE QUALITY	
Deviation in Length & Width	ISO-10545-02	± 0.10%	Within Criteria
Deviation in Thickness	ISO-10545-02	± 5.00%	Within Criteria
Straightness of Sides	ISO-10545-02	± 0.10%	Within Criteria
Rectangularity	ISO-10545-02	± 0.10%	Within Criteria
Surface Flatness	ISO-10545-02	± 0.50%	Within Criteria
Surface Quality	ISO-10545-02	Min. 95% of the Tiles shall be free from visible defects that would impaire the appearance of a major area of the Tiles	Within Criteria
	PHYSICAL PRO	PERTIES	
Water Absorbtion	ISO 10545-03	Average ≤ 0.08%, Individual 0.10% Max.	Within Criteria
Modulus of Rapture	ISO 10545-04	R ≥ 35 N/mm²	Compliant
Breaking Strength	ISO 10545-04	Min. 1300 N	Compliant
Moisture Expansion	IS 13630-3	0.02 Max	Compliant
Moh's Hardness	EN 101	Min. 5	Compliant
Surface Abration Resistance	ISO 10545-07	Class II Min.	Compliant
Linear Thermal Expansion	ISO 10545-08	Max. 6.0 x 10 ⁻⁶	Compliant
Thermal Shock Resistance	ISO 10545-09	Min. 10 Cycles	Compliant
Crazing Resistance	ISO 10545-11	4 Cycles at 7.5 Bar Min.	Compliant
Impact Resistance	ISO 10545-05	0.55 Min.	Compliant
Frost Resistance	ISO 10545-12	Required	Compliant
Resistance to Deep Abration (Unglazed Tiles)	ISO 10545-06	175 Max.	Compliant
Bulk Density	IS 15622-2	2.20 g/cc	Compliant
	CHEMICAL PRO	PERTIES	
Resistance to High & Low Concentrations of Acids & Alkalis	ISO 10545-13	As per Mfg.	No visible effect
Resistance to household chemicals & swimming pool Salts	ISO 10545-13	Min. GB	Compliant
Stain Resistance	ISO 10545-14	Min. Class 3	Compliant

Packing Details (Per Box)

Dimension	Pcs.	Sq. Mtr.	Sq. Ft.
200x1200mm	5	1.20	12.92

Disclaimer: Product images shown in this Catalogue are for Design Representation. All efforts are made to show accurate colour of the product but actual product colour may differ from the printed image due to printing limitations. It is advised to see the product samples for actual colour reference • Shade variation is inherent characteristic of ceramic products. Hence different sizes and batches of same design may have variation in colours • Please follow the Tile Laying instructions printed on the box before installing the Tiles • Company may change the designs, colours, randomness or book-match without prior intimation • Due to continuous technology upgrade technical specification of the products may change without prior intimation.